


## RQS ROTARY VALVE

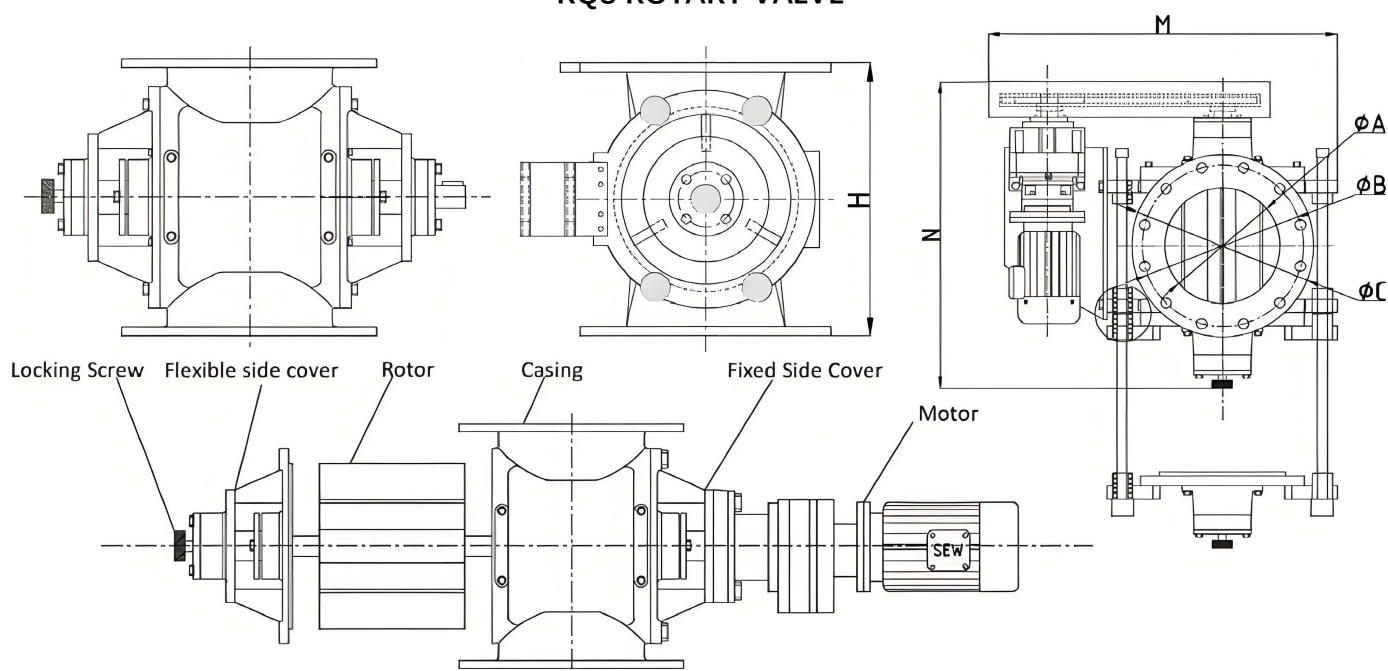

Model	Ltr/Rev	Inlet & outlet			H
		C	B	A	
RQS150	2 L/Rev	240	200	150	240
RQS200	6 L/Rev	300	260	200	300
RQS220	8 L/Rev	320	280	220	320
RQS240	10 L/Rev	340	300	240	340
RQS260	12 L/Rev	360	320	260	360
RQS300	16 L/Rev	400	360	300	400
RQS400	26 L/Rev	500	460	400	520
RQS500	40L/Rev	620	558	500	620
*Note: Technical modification are possible, dimensions in mm					
<b>Welcome to customize non-standard rotary valve !!</b>					

### Features and Function

- Standard Valves manufactured in Stainless Steel
- Drilled flanges in accordance with GB PN10, ANSI 150#, DIN PN10, JIS10K
- Close vane tolerances ensure high sealing and feeding efficiency and minimum air leakage.
- Outboard bearings are standard and a full range of shaft seal options is available
- Excellent performance in high-temperature Applications up to 250°C.
- Pressure differentials up to 1.5bar (21PSI)

### Options

- 304,316,304L,316L cast valve housing
- 6 vane, 10 vane or 12 vane rotor.
- Rotor design: close ended, and adjustable-tip Replaceable rotor wear tips
- Interior coatings: hard chrome, tungsten, and Teflon
- Air purge shaft sealing
- Valve housing vent ports.
- Accessories: speed monitor, vent box, Air purge regulation station